

Resistance thermometer For sanitary applications Model TR20, flush, NEUMO BioControl®

WIKA data sheet TE 60.20



for further approvals
see page 7

Applications

- Food industry
- Sanitary applications
- Bio and pharmaceutical industries
- Mounting in vessels with wipers
- Vessels for stirring and mixing

Special features

- Dead space free
- Hygienic design
- Materials and surface finish qualities in accordance with standards of hygienic design
- Material and surface finish qualities in accordance with pharmaceutical industry directives and standards
- Flush measurement, no invasive elements



Resistance thermometer model TR20
Options: Sealing combination at neck tube, cable gland in hygienic design

Description

The model TR20 resistance thermometer is used for temperature measurement in sanitary applications.

It features a flush NEUMO BioControl® connection and is therefore particularly suited to applications where a thermowell which extends into the process medium is either not possible or not desired. For increased hygiene requirements for those elements in contact with the surrounding environment, a stainless steel head is available in an optimised hygienic design.

The TR20 in combination with the block flange (low-profile design) is especially suitable for temperature measurement in mixing and agitating vessels with a wiper. The result is a flush-mounted instrumentation at the vessel wall. Thus an easy removal of the process medium from the inner wall is enabled by means of a rotating wiper. This results in a good homogenous mixture of the components and, at the same time, accurate temperature measurement in a mixing vessel.

BioControl® is a registered trademark of the company NEUMO.

Sensor

Versions with 1 x Pt100 in 2-, 3- or 4-wire connection.

Tolerance value/Application range of the sensor per EN 60751

- Class A -30 ... +250 °C
(not with 2-wire connection)
- Class B -50 ... +250 °C

The combination of a 2-wire connection with class A is not permissible, since the lead resistance overrides the higher sensor accuracy.

The sensor is connected permanently with the connection flange and thus not exchangeable. For calibration, the complete measuring instrument must be removed from the BioControl® case. Then, the TR20 can be calibrated in a calibration bath.

For detailed specifications for Pt100 sensors, see Technical information IN 00.17 at www.wika.com.

Documentation and correction of measuring deviations

With these electrical thermometers, the measuring deviation can be determined under realistic mounting conditions and confirmed with a test certificate. The standard test temperature is 70 °C; others available on request.

If a digital transmitter is mounted within the thermometer, any measuring deviation determined can be corrected using the transmitter's adaption feature.

Neck tube


- Material: Stainless steel
- Diameter: 12 mm
- Neck length: 70 mm (standard)
50 mm

others on request

Options

The transition from the connection head to the thermowell is effected via an optional sealing combination (polyurethane) of flat gasket and wiper. This combination permanently prevents the penetration and depositing of humidity and impurities in this area (IP68). Additionally, the sealing combination simplifies the cleaning process significantly.

In combination with the patented BVS head and the cable gland in hygienic design, it delivers an easy-to-clean and hygienic measuring point, even in those areas not in contact with the product.

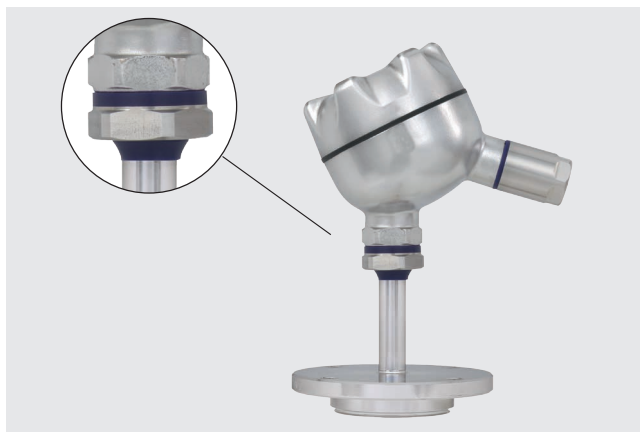


Connection head




BVC




BVS




BS




BSZ



BSZ-H



BSS



BSS-H

Model	Material	Cable outlet	Ingress protection	Cap	Surface	Weight in kg
BVC	Stainless steel (1.4571)	M16 x 1.5 ¹⁾	IP68	Flat screw-on lid	Natural finish	0.60
BVS	Stainless steel (1.4308)	M20 x 1.5 ¹⁾	IP65	Screw-on lid, hygienic design	Precision-cast, electropolished	0.50
BS	Aluminium	M20 x 1.5 ¹⁾	IP65 (IP68)	Cap with 2 screws	Blue, lacquered ²⁾	0.14
BSZ	Aluminium	M20 x 1.5 ¹⁾	IP65 (IP68)	Hinged cover with cylinder head screw	Blue, lacquered ²⁾	0.29
BSZ-H	Aluminium	M20 x 1.5 ¹⁾	IP65 (IP68)	Hinged cover with cylinder head screw	Blue, lacquered ²⁾	0.30
BSS	Aluminium	M20 x 1.5 ¹⁾	IP65	Hinged cover with clamping lever	Blue, lacquered ²⁾	0.27
BSS-H	Aluminium	M20 x 1.5 ¹⁾	IP65	Hinged cover with clamping lever	Blue, lacquered ²⁾	0.32

1) Standard
2) RAL 5022

Cable outlet with M12 x 1 coupler connector / 4-pin (option)

Instead of a standard cable gland, the cable outlet of a connection head can optionally be designed with an M12 x 1 (4-pin) coupler connector. The resulting maximum ingress protection is IP65.

Connecting with single strands for operation is not needed as pre-assembled cables can be used.



Connection head with M12 x 1 coupler connector (4-pin)

Connection head with digital indicator (option)

As an alternative to the standard connection head, the thermometer can be fitted with an optional DIH10 digital indicator. The connection head used for this is similar to the model BSZ-H head. For operation, a 4 ... 20 mA transmitter is needed, which is mounted to the measuring insert. The indication range is configured identically to the measuring range of the transmitter.



Connection head with digital indicator, model DIH10

Transmitter (option)

Depending on the connection head used, a transmitter can be mounted within the thermometer.

- Mounted instead of terminal block
- Mounted within the cap of the connection head
- Mounting not possible

Mounting of 2 transmitters on request.

Connection head	Transmitter model			
	T15	T32	T53	T91.10
BVC	○	○	○	○
BVS	○	○	○	○
BS	-	-	○	○
BSZ / BSZ-K	○	○	○	○
BSZ-H / BSZ-HK	●	●	●	●
BSS	○	○	○	○
BSS-H	●	●	●	●

Model	Description	Explosion protection	Data sheet
T15	Digital transmitter, PC configurable	Optional	TE 15.01
T32	Digital transmitter, HART® protocol	Optional	TE 32.04
T53	Digital transmitter, FOUNDATION™ Fieldbus and PROFIBUS® PA	Standard	TE 53.01
T91.10	Analogue transmitter, fixed measuring range	Without	TE 91.01

BioControl® connection

The flange connection is designed for fitting to the model 910.60 NEUMO BioControl® system.

BioControl® connection

Size 25, 50 and 65

Wetted material

Stainless steel 1.4435

Wetted surface

Versions:

- 0.8 µm (standard)
- 0.4 µm
- 0.4 µm electropolished
- 0.25 µm mechanical- and electropolished

Sealing (available as an option)


EPDM or FEP with FPM core

(both materials are FDA approved)

Nominal pressure

PN 16

Installation example: mounting in a vessel

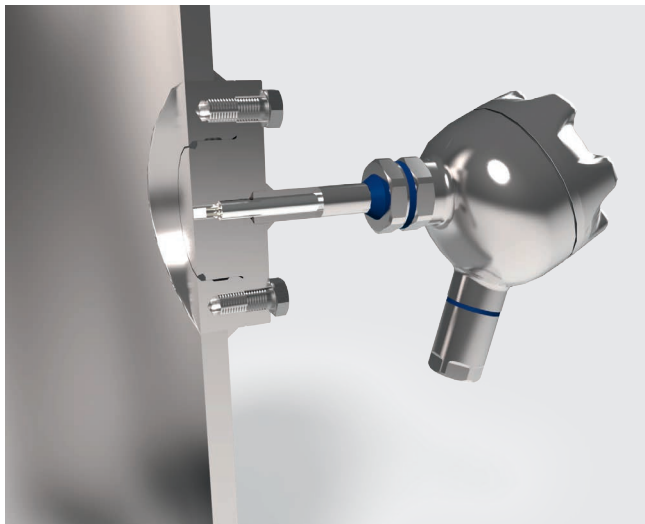


For flush instrumentation of a vessel with wipers, the TR20 in conjunction with a BioControl® block flange (B) is suitable. For this, the block flange is flush-welded into the vessel wall from the inside and then smoothed down.

After fitting the TR20, the user has an easily cleanable, flush measuring point, without any invasive components. With this design, the temperature of the process medium can be determined directly at the inner wall of the vessel.


BioControl® case

The case of the NEUMO BioControl® system is not part of the scope of delivery of the resistance thermometer described here, and can be ordered as an additional item. For a detailed description of this case, see data sheet AC 09.14.


Case type (G), size 25

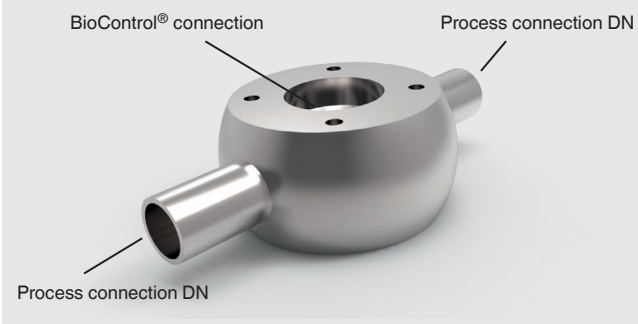


Case type (G), sizes 50 and 65

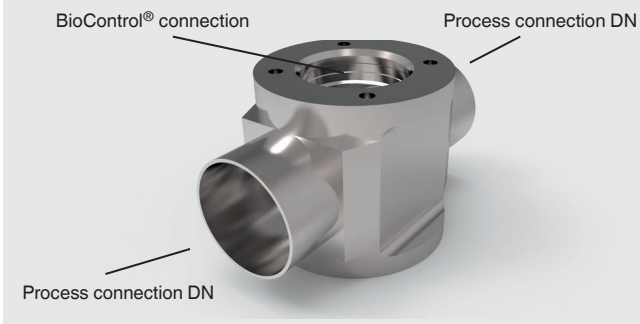


Case type - angled variant (U), size 25

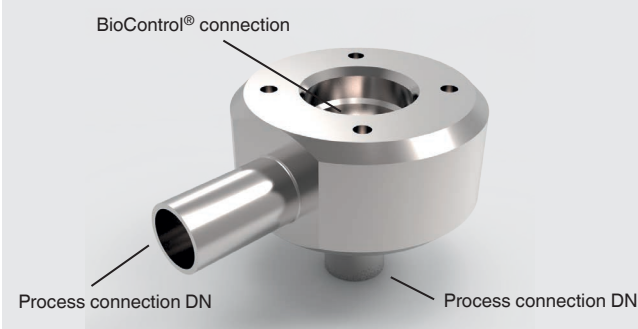


Case type - angled variant (U), sizes 50 and 65

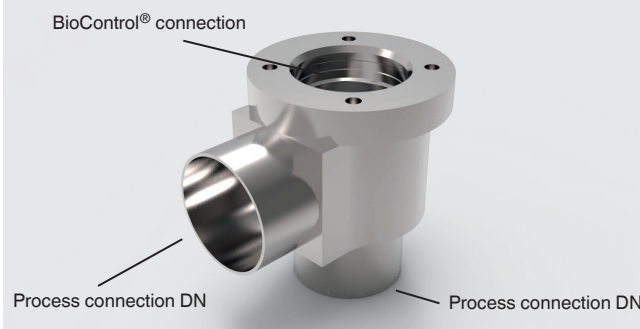

Block flange (B) variant, low-profile version

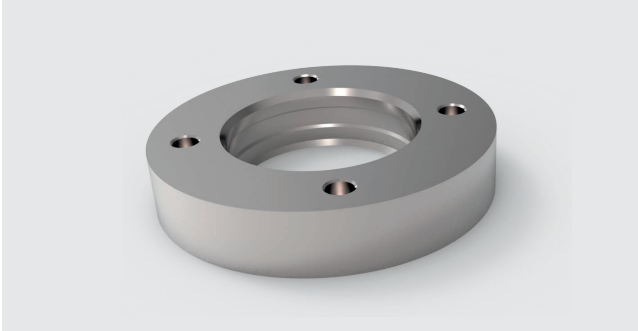


Block flange (B) variant, high version

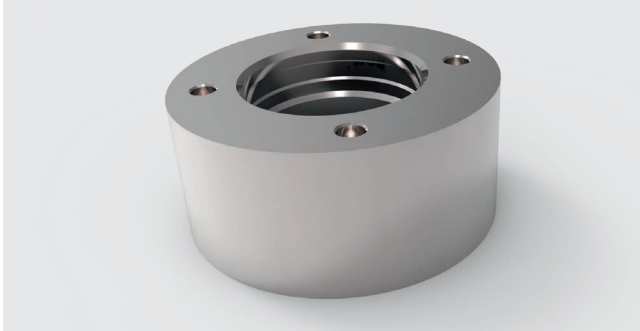


Dimensions in mm

Standard version

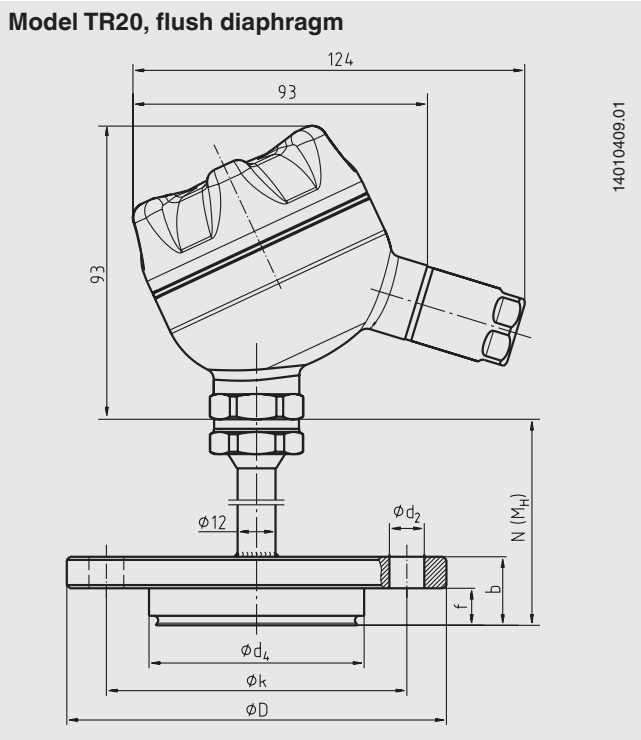

BioControl® connection	Dimensions in mm						Weight in kg
Size	Ø d ₂	Ø d ₄	Ø D	f	b	Ø k	
25	4 x Ø 7	30.5	64	11	20	50	1.0
50	4 x Ø 9	50	90	17	27	70	1.4
65	4 x Ø 11	68	120	17	27	95	2.0

Electrical connection

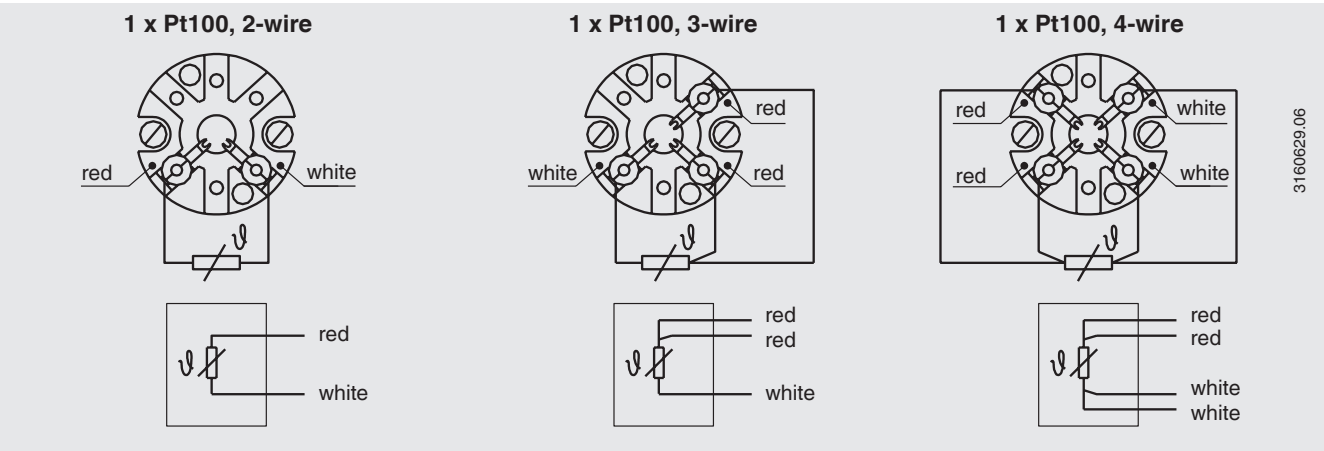

For the electrical connections of built-in temperature transmitters see the corresponding data sheets or operating instructions.










Explosion protection (option)

Resistance thermometers of the TR20 series are available with an EC-type examination certificate for “intrinsically safe”, Ex i, ignition protection. These instruments comply with the requirements of the ATEX directive for gas.

The permissible power, P_{max} , as well as the permissible ambient temperature for the respective category can be seen on the EC-type examination certificate and in the operating instructions.

Built-in transmitters have their own EC-type examination certificate. The permissible ambient temperature ranges of the built-in transmitters can be taken from the corresponding transmitter approval. The system operator is responsible for using suitable thermowells.

Approvals

Logo	Description	Country
	EU declaration of conformity ■ EMC directive ¹⁾ EN 61326 emission (group 1, class B) and interference immunity (industrial application) ■ ATEX directive (option) Hazardous areas	European Community
		
	IECEx (option) Hazardous areas	IECEx member states
	EAC (option) ■ Electromagnetic compatibility ¹⁾ ■ Hazardous areas	Eurasian Economic Community
	GOST (option) Metrology, measurement technology	Russia
	KazInMetr (option) Metrology, measurement technology	Kazakhstan
-	MTSCHS (option) Permission for commissioning	Kazakhstan
	BelGIM (option) Metrology, measurement technology	Belarus
	Uzstandard (option) Metrology, measurement technology	Uzbekistan
	INMETRO (option) ■ Metrology, measurement technology ■ Hazardous areas	Brazil
	NEPSI (option) Hazardous areas	China
	KOSHA (option) Hazardous areas	South Korea
-	PESO (option) Hazardous areas	India
	3-A (option) ²⁾ Sanitary Standard	USA

¹⁾ Only for built-in transmitter

²⁾ Confirmation of 3-A conformity only valid with separately selectable 2.2 test report

Approvals and certificates, see website

Certificates (option)

- 2.2 test report
- 3.1 inspection certificate
- DKD/DAkkS calibration certificate
- Manufacturer's declaration regarding regulation (EC) 1935/2004
- Hygienic design conformity

Patents, property rights

Case with easily cleanable twist crown, integrated into the case cap, is registered under no. GM 000984349

Ordering information

Model / Connection head / Cable outlet of connection head / Terminal block, transmitter / Process connection / Surface of wetted parts / Neck tube / Measuring element / Connection method / Temperature range / Certificates / Options

© 06/2008 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.
The specifications given in this document represent the state of engineering at the time of publishing.
We reserve the right to make modifications to the specifications and materials.



WIKA Alexander Wiegand SE & Co. KG
Alexander-Wiegand-Straße 30
63911 Klingenberg/Germany
Tel. +49 9372 132-0
Fax +49 9372 132-406
info@wika.de
www.wika.de